


Ecos M Single Lever Basin Mixer CoolStart

- ComfortZone 70
- cold water in middle position
- solid brass
- projection 101 mm
- flow rate: 5 l/min
- ceramic cartridge
- temperature limitation adjustable
- push-open waste set G 1¼
- suitable for continuous flow water heaters
- connection dimension: DN15

chrome

14821

14042000

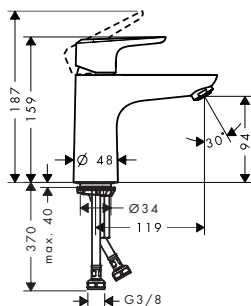


Ecos L Single Lever Basin Mixer CoolStart

- ComfortZone 100
- cold water in middle position
- solid brass
- projection 119 mm
- normal spray
- flow rate: 5 l/min
- ceramic cartridge
- temperature limitation adjustable
- push-open waste set G 1¼
- suitable for continuous flow water heaters
- suitable for electronic continuous flow water heaters
- connection dimension: DN15

chrome

14822

14043000

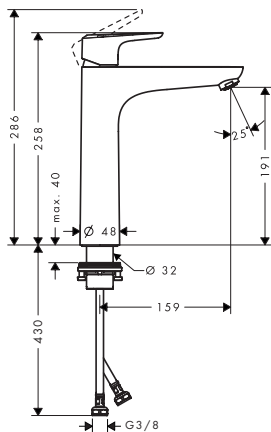


Ecos XL Single Lever Basin Mixer CoolStart

- ComfortZone 190
- cold water in middle position
- solid brass
- projection 159 mm
- normal spray
- flow rate: 5 l/min
- ceramic cartridge
- temperature limitation adjustable
- without waste set
- suitable for continuous flow water heaters
- connection dimension: DN15

chrome

14823

14044000

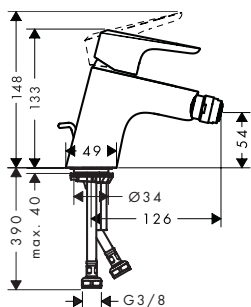

Ecos Single Lever Bidet Mixer


- aerator with ball pivot
- normal spray
- flow rate: 7.2 l/min
- ceramic cartridge
- temperature limitation adjustable
- pop-up waste set G 1¼
- suitable for continuous flow water heaters
- connection dimension: DN15

chrome

14824

14082000



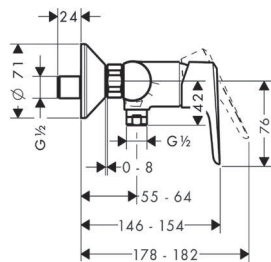


Ecos Single Lever Shower Mixer

chrome

14825

14086000

- 1 outlet
- connection type: s-shaped connections
- flow rate: 22 l/min
- ceramic cartridge
- temperature limitation adjustable
- material: brass
- suitable for continuous flow water heaters
- hose connection DN15
- spray type: normal spray

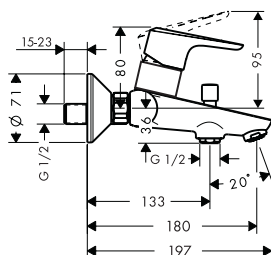


Ecos Single Lever Bath Mixer

chrome

14828

14084000

- projection 172 - 180 mm
- connection type: s-shaped connections
- centre distance: 150 ± 12 mm
- flow rate: 19 l/min
- ceramic cartridge
- temperature limitation adjustable
- without smooth surfaces
- non-return valve
- with silencer
- no integrated shower support
- suitable for continuous flow water heaters




Ecos Single Lever Bath Mixer Set for concealed installation

chrome

14827

31799000

- projection 95 mm
- connection type: basic set
- normal spray
- flow rate: 30 l/min
- ceramic cartridge
- temperature limitation adjustable
- material: solid brass
- without smooth surfaces
- without easy gripping surface through handle design
- non-return valve
- suitable for continuous flow water heaters

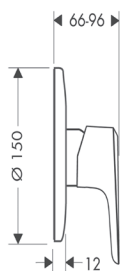

Ecos Single Lever Shower Mixer Set for concealed installation

chrome

14826

31702000

- 1 outlet
- connection type: basic set
- flow rate: 17 l/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters